



## FEATURES & FUNCTIONS

- Highly-accurate, electronic digital weighing scale
- With Tare feature for weighing items using a container

## SPECIFICATIONS

|                        |  |
|------------------------|--|
| <b>Range</b>           | : 0 ~ 5lbs.<br>Mechanical overload protection  |
| <b>Tare</b>            | : Unlimited up to scale's maximum capacity but will not extend the range of the load cell.<br>0 Weight No Tare Function. |
| <b>Negative weight</b> | : Tare Function will set negative weight to 0 without add-on.  |

|                             |  |
|-----------------------------|--|
| <b>Tare upon turning on</b> | : Allow tare up to max tare upon turn on, but this will not extend the measuring range on the scale.   |
| <b>Accuracy</b>             | : $\pm 0.1\%$ of reading $\pm 1$ digit   |
| <b>Calibration</b>          | : Four points of Automatic Calibration for greater accuracy  |
| <b>Resolution</b>           | : 0.1 oz   |
| <b>Minimum Weight</b>       | : 0.1 oz   |
| <b>Min. Add-on Wt.</b>      | : 0.1 oz   |
| <b>Power</b>                | : AC Adaptor – 9V, 100mA (Supplied)<br>9V Alkaline battery (Not supplied)  |
| <b>Auto Off</b>             | : Auto off after 5 minutes of non-use in battery operation   |
| <b>Warm-up time</b>         | : 1 minute or less   |
| <b>Display</b>              | : 7-segment LCD with 3 + 2 half digits   |
| <b>Temperature</b>          | : Good performance within -10 degree Centigrade to +45 degree Centigrade.<br>The scale is designed to operate in normal room temperatures. If subjected to cold or warm temperatures, it should be allowed to reach room temperature before operating. |
| <b>Case &amp; Platform</b>  | : Fine textured ABS plastic or equivalent  |
| <b>Load Cell Technology</b> | : Four optimal placed single strain gages with temperature compensation  |
| <b>Load Cell Body</b>       | : High Tensile Strength Aluminum Alloy   |


## PHYSICAL FEATURES

|                      |   |
|----------------------|---|
| <b>Dimensions</b>    | : 7 <sup>3</sup> / <sub>4</sub> " x 5 <sup>1</sup> / <sub>2</sub> " x 2 <sup>1</sup> / <sub>4</sub> " |
| <b>Platform Size</b> | : 5 <sup>1</sup> / <sub>2</sub> " x 5" with fold up platform to weigh the large letters.              |
| <b>Weight</b>        | : 1lb 2.8oz Without AC adapter  |

## KEYS

|                   |                  |
|-------------------|------------------|
| <b>Technology</b> | : Clicker Switch |
| <b>Quantity</b>   | : 2              |

## KEYBOARD LAYOUT

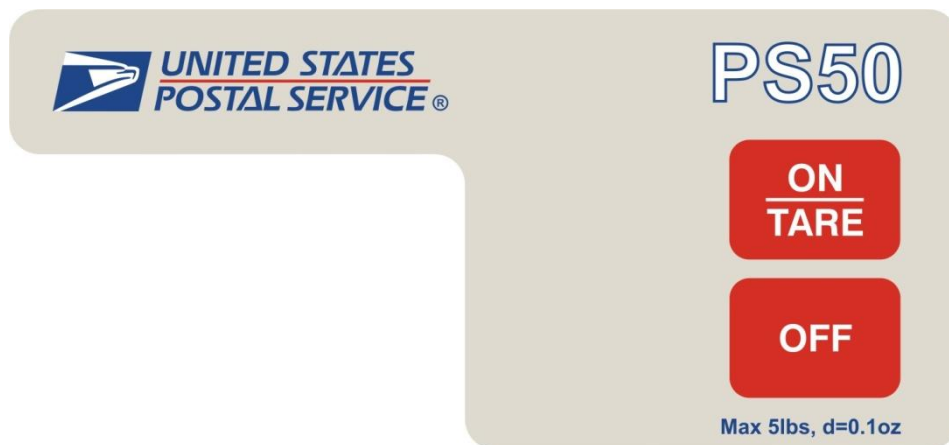

## PACKAGING

|                         |  |
|-------------------------|--|
| Box Dimension           | : 11" x 6 <sup>1</sup> / <sub>4</sub> " x 3 <sup>1</sup> / <sub>4</sub> "                                |
| Packaged Weight         | : 2lbs 4oz   |
| Master Carton Dimension | : 23 <sup>1</sup> / <sub>2</sub> " x 18 <sup>1</sup> / <sub>2</sub> " x 12 <sup>1</sup> / <sub>4</sub> " |
|                         | Quantity: 20 boxes per Master carton   |
|                         | Volume: 0.09 cbm   |
|                         | Gross Weight: 42 lbs   |
|                         | IATA Dimensional Weight: 33 lbs  |