

**Postage USA 9-key 10lb Postage Computing Scale DATA SHEET**



**FEATURES & FUNCTIONS**

- Calculates postal rates for all of the most popular postal services of USPS for domestic and international mail.
- Domestic rates available:
  - 1<sup>st</sup> Class Mail
  - Priority Mail
  - Packages
  - Media Mail
  - Domestic Express Mail
- International rates available:
  - International Airmail Letters (Canada, Mexico, Rate Groups 3, 4, 5)
  - Global Express Mail (Canada, Mexico, UK, Japan, China)
- Special services available:
  - Registered (up to US\$25000 insurance for local services)
  - Certified
  - Return Receipt
- Automatic user calibration of 1oz and 5lb.

## SPECIFICATIONS

<b>Range</b>	: 0 ~ 10lbs. Mechanical overload protection
<b>Tare loadcell.</b>	: Unlimited up to scale's maximum capacity but will not extend the range of the 0 Weight No Tare Function.
<b>Negative weight</b>	: Tare Function will set negative weight to 0 without add-on.
<b>Tare upon turning on</b>	: Allow tare up to max tare upon turn on, but this will not extend the measuring range on the scale.
<b>Accuracy</b>	: $\pm 0.1$ % of reading $\pm 1$ digit
<b>Calibration</b>	: In the event that the scale loses accuracy, recalibration may be required if the load cell of the scale is overloaded due to dropping something heavy on the scale, or after a scale fell to the floor. User calibration of 1oz and 5lb is available.
<b>Resolution</b>	: 0.1 oz
<b>Minimum Weight</b>	: >0.1 oz
<b>Min. Add-on Wt.</b>	: >0.1 oz
<b>Power Consumption</b>	: Approx 0.35W ~ 0.40W
<b>Power</b>	: AC Adaptor – 9V, 100mA (Supplied)
<b>On/Off</b>	: Scale switches on automatically upon adaptor plug in
<b>Warm-up time</b>	: 2 seconds or less.
<b>Display</b>	: 2 lines with 8 characters dot matrix liquid crystal display, with clear protective Plastic Bezel.
<b>Warm up display</b>	: Selftest
<b>Low Power</b>	: $7V \pm 0.3V$
<b>Temperature</b>	: Good performance within -10 degree Centigrade to +45 degree Centigrade. The scale is designed to operate in normal room temperatures. If subjected to cold or warm temperatures, it should be allowed to reach room temperature before operating.
<b>Case &amp; Platform</b>	: Fine texture ABS plastic or equivalent.
<b>Load Cell Technology</b>	: Four element single strain gage with temperature compensation
<b>Load Cell Body</b>	: Material: 2024 – T4/T351 Aluminum Alloy
<b>Rate Change</b>	: Easily Replaceable Data Chip


## PHYSICAL FEATURES

**Dimensions** : 20cm X 14.2cm X 5.8cm  
**Platform Size** : 14cm X 12cm with fold up platform to weigh the large letters.  
**Weight** : 518g Without AC adapter

## KEYS

**Technology** : Membrane, Domed Keyboard for Tactile Response  
**Quantity** : 9

## KEYBOARD LAYOUT

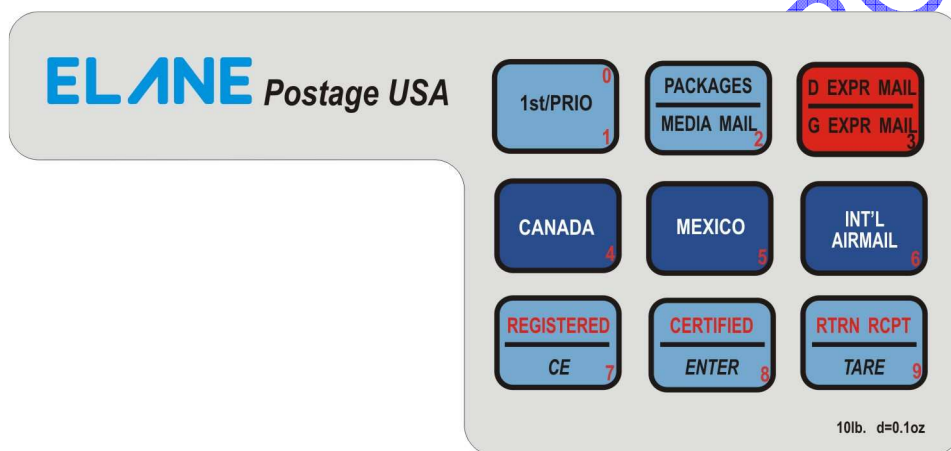

## PACKAGING

**Box Dimension** : 27.8cm X 15.8cm X 8cm  
**Master carton Dimension**: 60.0cm X 47.0cm X 31.0cm  
Quantity: 20 boxes per Master carton  
Volume: 0.09 cbm  
Gross Weight: 18.50 kg (42 lbs, USA only)  
IATA Dimensional Weight: 14.50kg (33 lbs, USA only)

## WARRANTY

1 year from date of sale to end-user against defect in manufacturing and materials.