



**FUNCTIONS**

- **Calculates all of the most popular Postal Rates for Australia for domestic, INTRASTATE, INTERSTATE, and international mail**
- **Calculates distance charges for Express Post and Parcel Post items**
- **Programmable lodgment zone**
- **Database of postal codes for automatic zone lookup for Express Post Parcel and Parcel Post items**
- **Database of country codes for automatic zone lookup for international mail services**
- **Cubic weight calculation**
- **Manual weight entry for items up to 20kg**
- **Franked and metered rates available**
- **GST rates available**

**Domestic (local) services available:**

- **Small Letter**
- **Large Letter**
- **Clean Mail**
- **Local Parcel**
- **Local Parcel (carriage by air)**
- **Parcel Within 50km**
- **Parcel Post**

- Express Post Parcel
- Express Post C5, B4, 500g, 3kg
- Ordinary Metered Mail

**International services available:**

- Airmail International Standard Letter
- Airmail International Large Letter
- Airmail International Air Parcel
- Sea Mail Parcel
- Express Courier International (Documents and Merchandise)
- Registered Post International

**Special services available**

- Cash on Delivery
- Person to Person
- Insurance
- Delivery Confirmation
- Registered Post
- Bar Coded and Metered
- Franked and Metered
- GST Rates for international services

## SPECIFICATIONS


<b>Range</b>	:	0 ~ 5000g Presence of overload stopper to prevent damage from overloading.
<b>Tare</b>	:	0 ~ 1500g. Tare Function will set negative weight to 0 without add-on.
<b>Tare upon taring on</b>	:	Allow tare up to max tare upon turn on, but this will not extend the measuring range on the scale.
<b>Accuracy</b>	:	±1% of reading ±1 digit
<b>Calibration</b>	:	Five points of Automatic Calibration for greater accuracy. In the event that the scale loses accuracy, recalibration may be required if the load cell of the scale is overloaded due to dropping something heavy on the scale, or dropping it.
<b>Resolution</b>	:	1g step.
<b>Minimum Weight</b>	:	1g
<b>Min. Add-on Wt.</b>	:	1g
<b>Power Consumption</b>	:	Approx 1.3 W
<b>Power</b>	:	100mA 15 V AC Adaptor (Supplied)
<b>Warm-up time</b>	:	2 seconds or less.
<b>Display</b>	:	2 lines with 16 characters dot matrix liquid crystal display, with clear protective Plastic Bezel.

- Auto Off** : Auto off after 5 mins of no Load Change. This can be removed according to the customer's request. \*
- Temperature** : Good performance within -10 degree Centigrade to +45 degree Centigrade.
- Humidity** : Performs to OIML standards within humidity range from 20% to 95% (non-condensing).
- Case & Platform** : Fine texture ABS plastic or equivalent.
- Load Cell Technology** : Temperature compensated 2024 – T4/T351 Aluminum Alloy Material
- Rate Change** : Easily Replaceable Rate Change Chips

**KEYS**

- Beeping** : Audible beep
- Technology** : Membrane
- Quantity** : 36

**KEYBOARD LAYOUT**

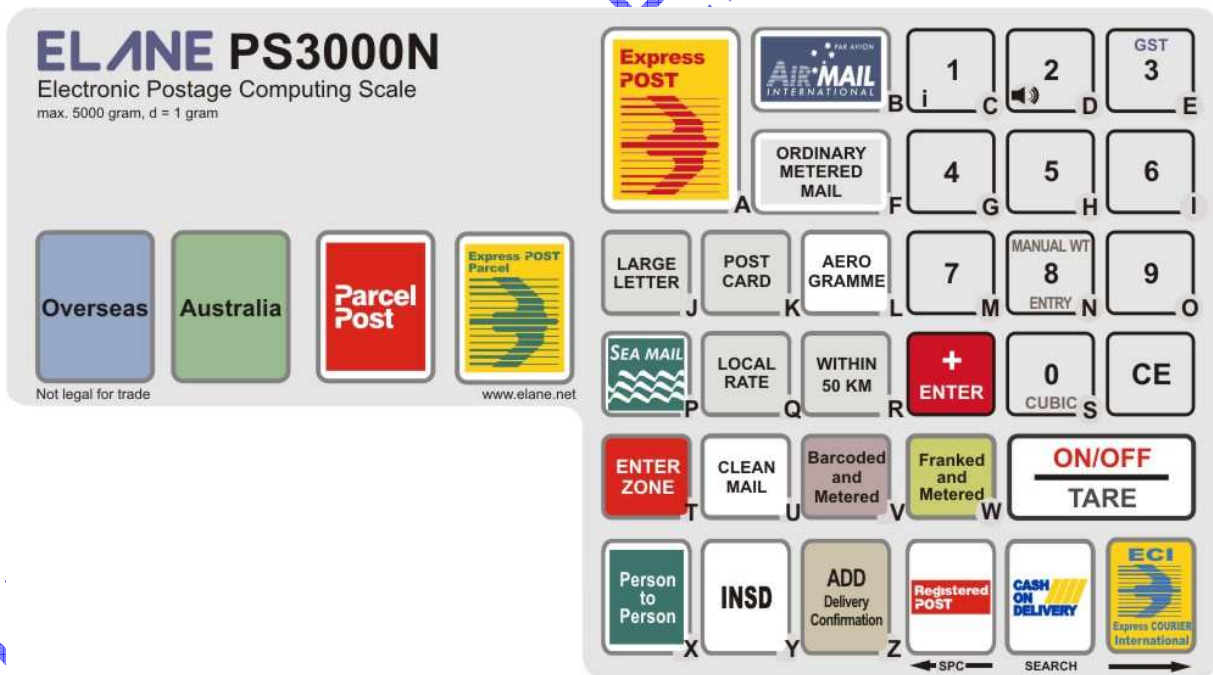

**PHYSICAL FEATURES**

- Dimensions** : 28cm X 20cm X 9.6cm
- Platform Size** : 19cm x 13cm
- Weight** : 2lb 8.35oz (1140g)

## PACKAGING

**Box Dimension** : 40cm X 26.5cm X 9.8cm  
**Packaged Weight** : 1.80kg (4lbs 1.80oz)  
**Master carton Dimension:** 55.0cm X 52.0cm X 43.0cm  
Quantity: 10 boxes per Master carton  
Volume: 0.13 cbm  
Gross Weight: 18.50 kg (42 lbs)  
IATA Dimensional Weight: 21.50kg (48 lbs)

## WARRANTY

1 year from date of sale to end-user against defect in manufacturing and materials

XIAMEN ELANE ELECTRONICS