



FUNCTIONS

- Database of country codes for all countries (automatic USPS postal rate group lookup for country code and country name entries)
- Instant selection of international destinations (Canada, Mexico, UK, China, and Japan)
- With manual weight entry up to 70 lbs to calculate postal rates for items above the scale's weighing capacity
- Calculates postal rates for almost ALL USPS postal services for local and international mail
- Choose between English or Spanish scale language

Basic postal services available:

- 1st Class (Letters, Flats, Parcels)
- Priority (Local, Zones 1-8)
- Priority Mail Flat Rate Envelopes
- Priority Mail Flat Rate Boxes
- Packages (Local, Zones 1-8)
- Media Mail
- Library Mail
- Express Mail (Local, Zones 1-8)
- Express Mail Flat Rate Envelopes

- Bound Printed Matter Parcels (Local, Zones 1-8)
- Bound Printed Matter Flats (Local, Zones 1-8)
- First Class Mail International (Letters, Flats, Parcels)
- Priority Mail International
- Priority Mail International Flat Rate Envelopes
- Priority Mail International Flat Rate Boxes
- Express Mail International
- Express Mail International Flat Rate Envelopes
- Global Express Guaranteed
- Postcard (Domestic and International)

Special services available:

- Registered Mail
- Certified Mail
- COD
- Insurance
- Return Receipt

SPECIFICATIONS

Range	:	0 ~ 10lb Presence of overload stopper to prevent damage from overloading
Tare upon turning on	:	Allow tare up to max tare upon turn on, but this will not extend the measuring range on the scale.
Accuracy	:	±1% of reading ±1 digit
Calibration	:	Five points of Automatic Calibration for greater accuracy. In the event that the scale loses accuracy, recalibration may be required if the load cell of the scale is overloaded due to dropping something heavy on the scale, or dropping it.
Resolution	:	0.1 oz step.
Minimum Weight	:	>0.1 oz
Min. Add-on Wt.	:	>0.1 oz
Power Consumption	:	Approx 1.3 W
Power	:	100mA 15 V AC Adaptor (Supplied)
Warm-up time	:	2 seconds or less.
Display	:	2 lines with 16 characters dot matrix liquid crystal display, with clear protective Plastic Bezel.
Auto Off	:	Auto off after 5 minutes of no Load Change. This can be removed according to the customer's request.
Temperature	:	Good performance within -10 degree Centigrade to +45 degree Centigrade.
Humidity	:	Performs to OIML standards within humidity range from 20% to 95% (non-condensing).

Case & Platform : Fine texture ABS plastic or equivalent.


Load Cell Technology : Temperature compensated 2024 – T4/T351 Aluminum Alloy Material

Rate Change : Easily Replaceable Rate Change Chips

KEYS

Beeping : Audible beep
Technology : Membrane
Quantity : 36

KEYBOARD LAYOUT

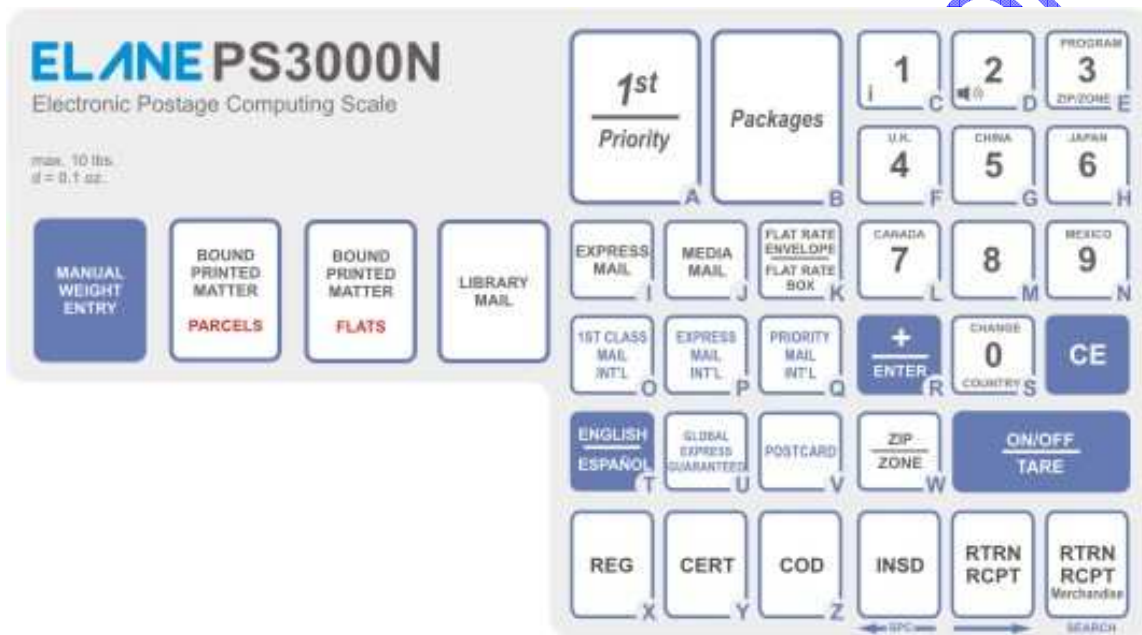

PACKAGING

Box Dimension : 40cm X 26.5cm X 9.8cm
Packaged Weight : 1.80kg (4lbs 1.80oz)
Master carton Dimension: 55.0cm X 52.0cm X 43.0cm
 Quantity: 10 boxes per Master carton
 Volume: 0.13 cbm
 Gross Weight: 18.50 kg (42 lbs)
 IATA Dimensional Weight: 21.50kg (48 lbs)

WARRANTY

1 year from date of sale to end-user against defect in manufacturing and materials